



AMAZONE

www.precision-today.net

ZA-TS – A world of precision

Mounted spreader | 1,400 l – 4,200 l | 15 m – 54 m

ArgusTwin

Permanent monitoring and optimisation of the lateral distribution via radar sensors.

WindControl system

The influence of the wind on the spread pattern is permanently monitored and automatically compensated for with WindControl.

AutoTS border spreading system

The disc-integrated AutoTS border spreading system can be used for comfortable activation of the various border spreading procedures from the tractor cab via the terminal.

FlowCheck


Permanent monitoring of the outlet openings for blockages and empty running.

Profis weighing check

Precise monitoring and control of the application rate via the 200 Hz weighing technology and the tilt sensor.

DynamicSpread dynamic part-width section control

The automatic part-width section control with up to 128 part-width sections in the form of a kidney-shaped pattern guarantees high precision switching in wedge shaped fields or at the headland. Outer part-width sections can also be controlled.

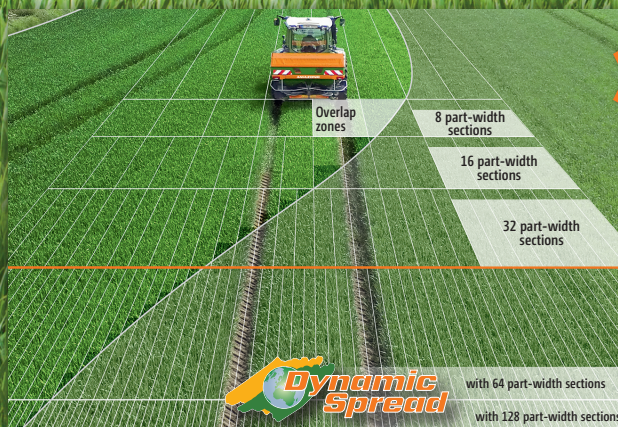

AmaTron 4
ISOBUS terminal



GO for Innovation | amzone.net



ready for
agrirouter