




AMAZONE

ZG-TS & ZA-TS Benefits


TS spreading unit

- ✔ Self-adjusting drop point
- ✔ 15–54 m working width
- ✔ Spreading capacity up to 10,8 kg per second (650 kg per minute)

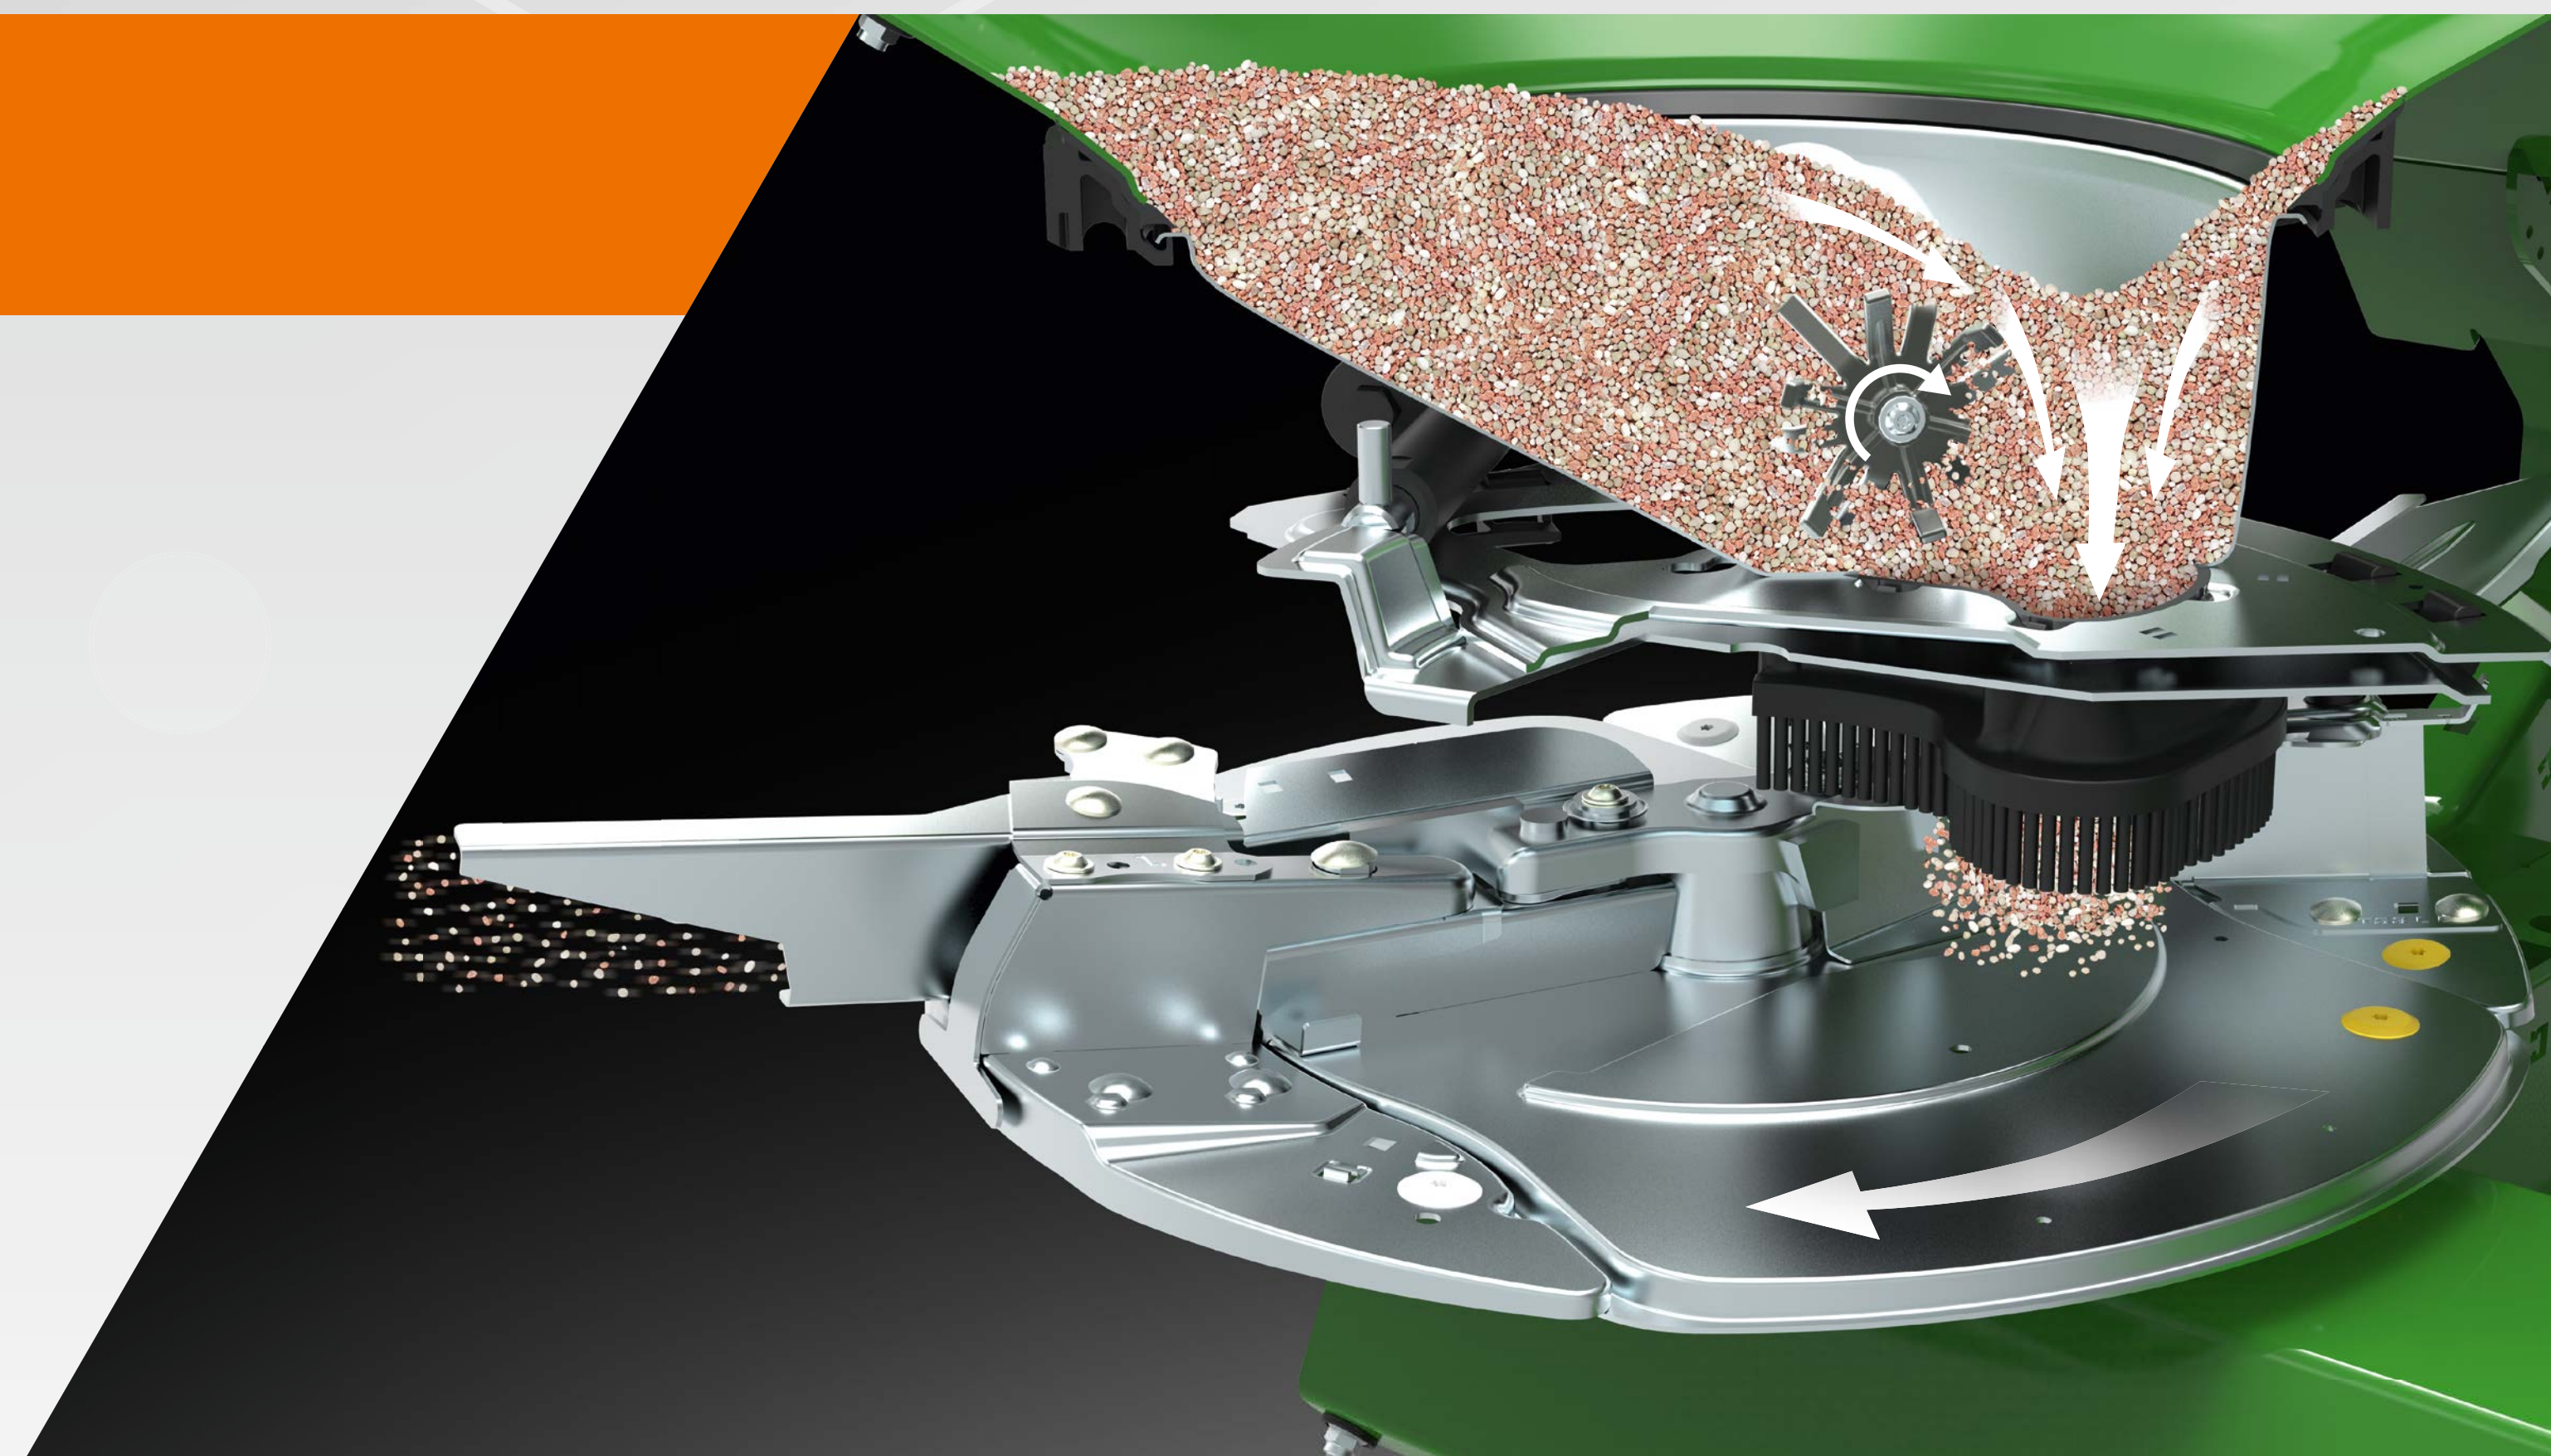


DynamicSpread

- ✔ Dynamic part-width section control
- ✔ Automatic part-width section control with up to 128 part-width sections
- ✔ The form of a kidney-shaped pattern guarantees high precision switching in wedge shaped fields or at the headland
- ✔ Outer part-width sections can also be controlled

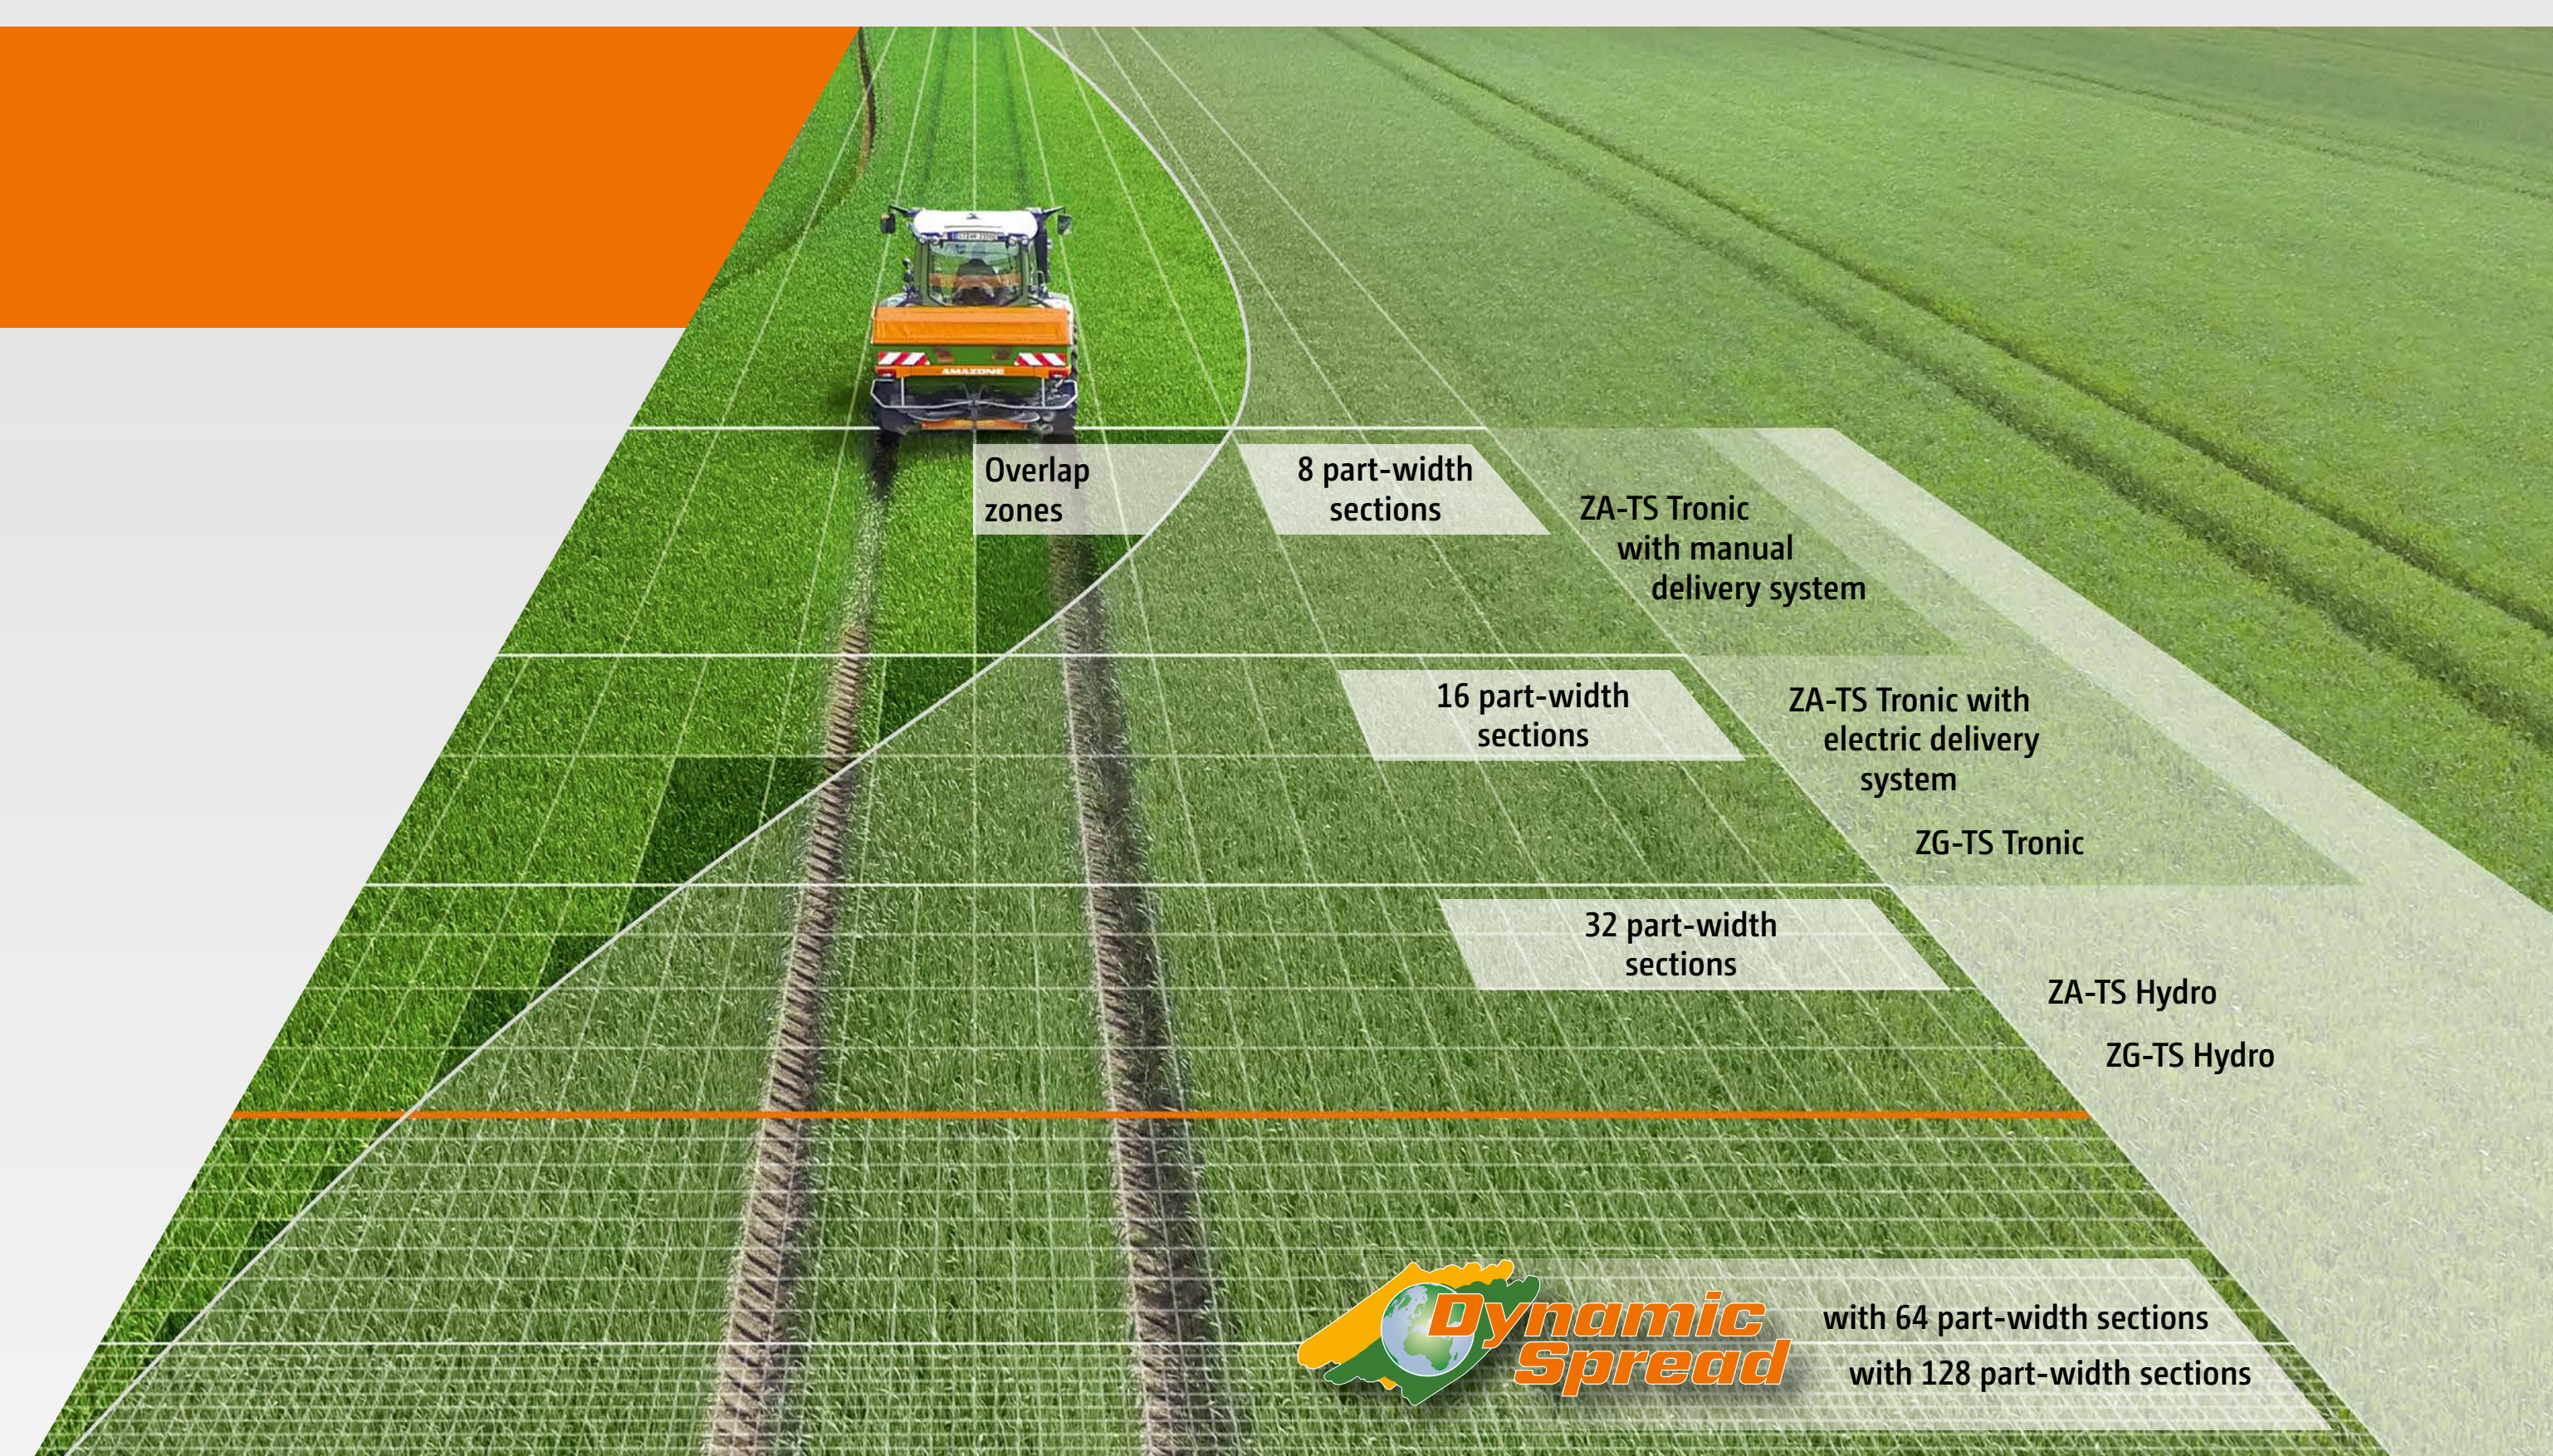

ArgusTwin

- ✔ Constant monitoring of the spread pattern
- ✔ Actual spread pattern of the fertilizer is compared to the target spread pattern and the delivery system is adjusted if necessary

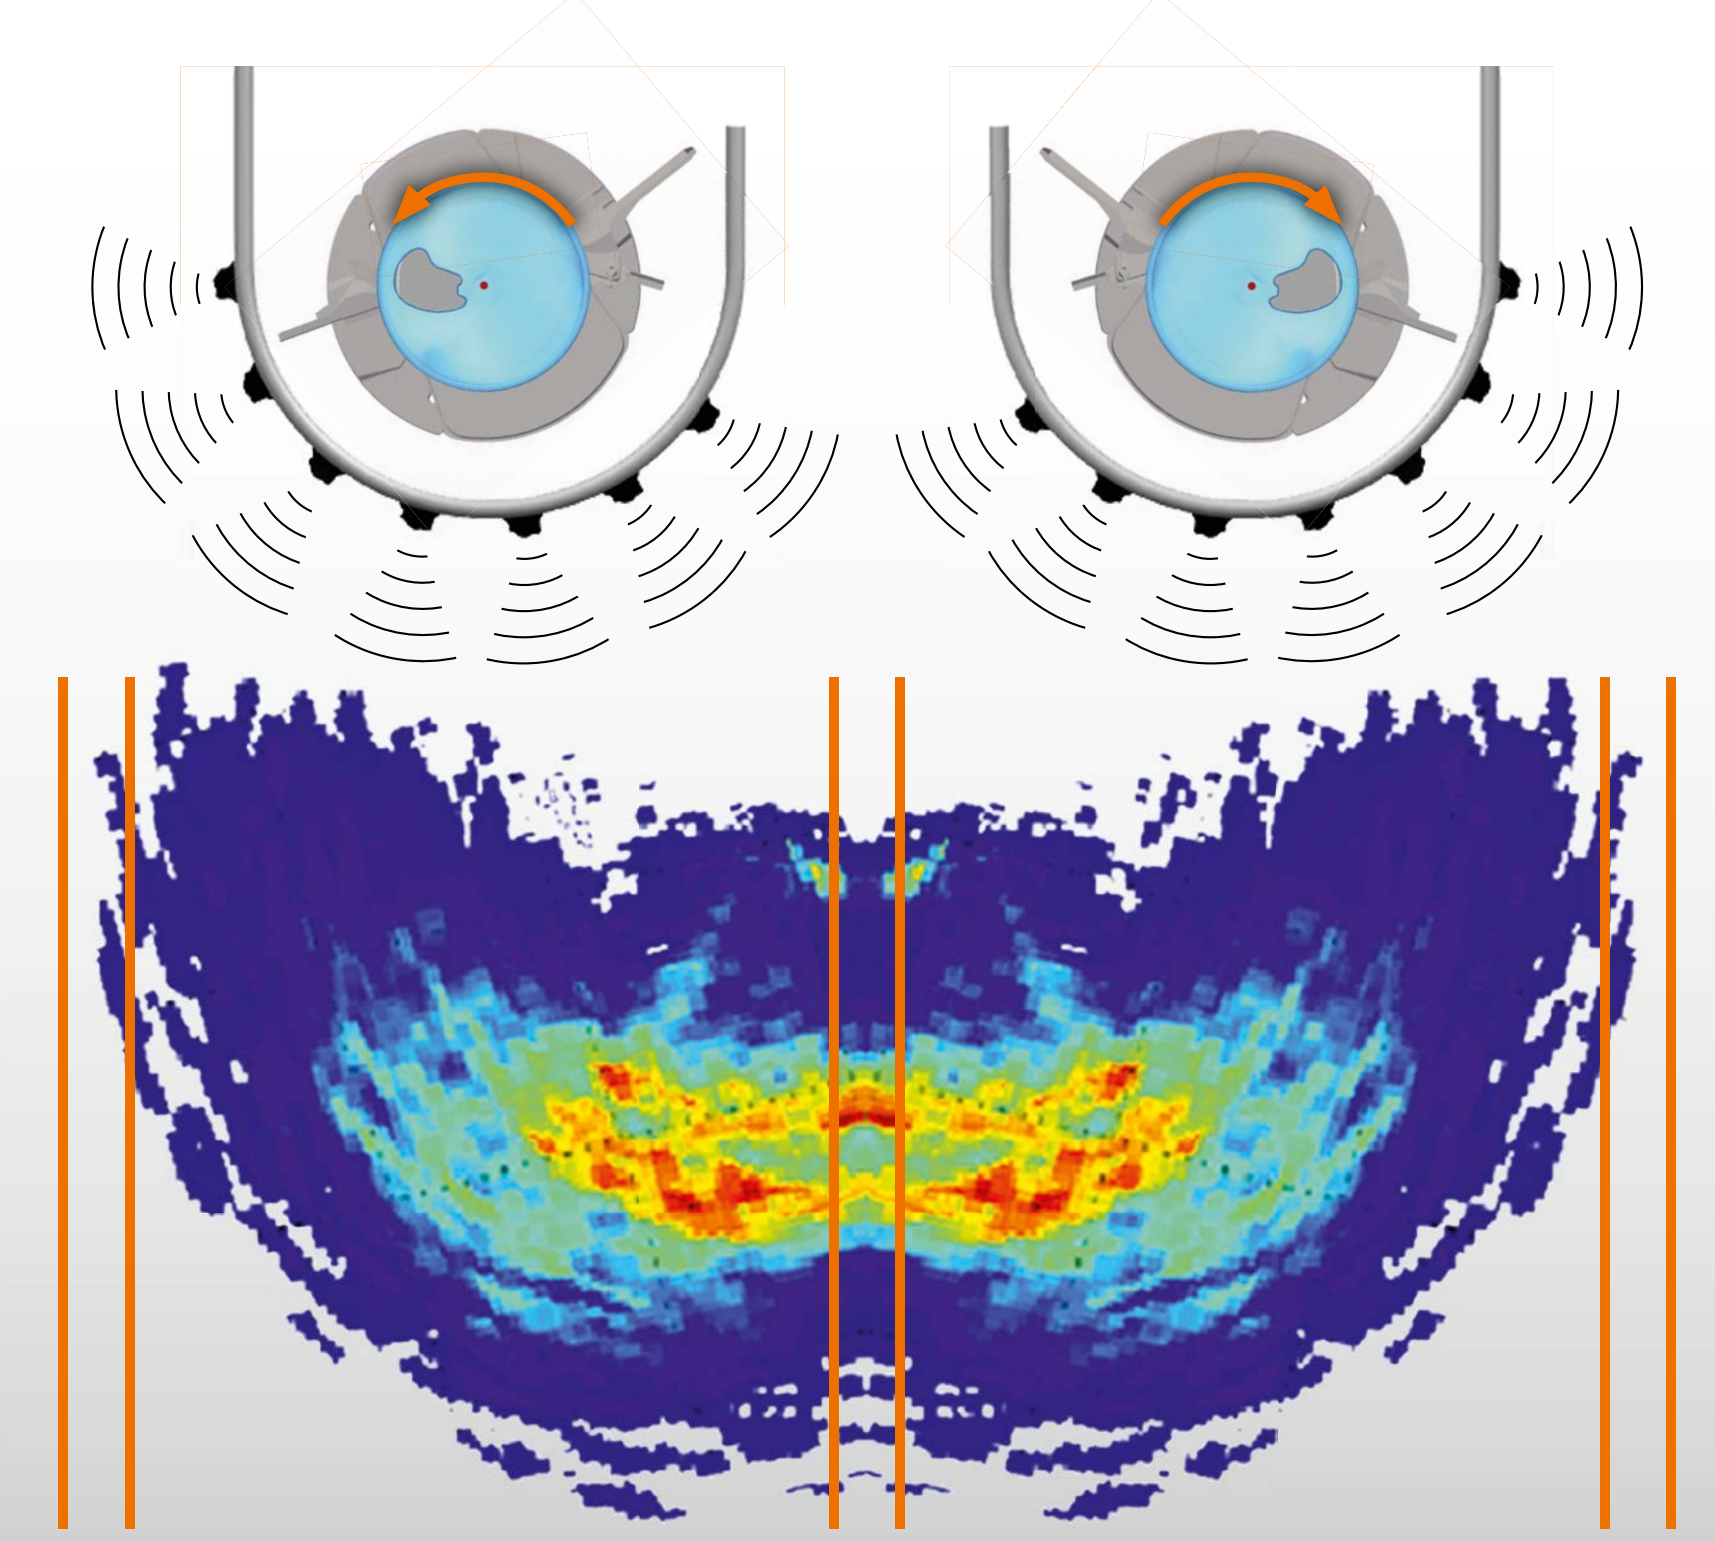

WindControl

- ✔ Stability during the spreading process by maintaining a good spread pattern even under changing wind conditions
- ✔ Automatic compensation for the effect of the wind according to Prof. Dr. Karl Wild of the University of Applied Sciences, Dresden

