


Lube regulation for Taurus 4000/3000

Item	Designation	No.	Lube interval	Lubricant	Comment
S1	Drawbaw, load bearing bolt	1	50 operational hours	SWA 523	Lube nipple
S2	Lifting cylinder, axle, top and bottom joints	2	50 operational hours	SWA 523	Lube nipple
S3	Axle, axle bolts, lubricated	2	50 operational hours	SWA 523	Lube nipple
S4	Disc bearing (brake disc segment)	8	200 operational hours	SWA 523	Lube nipple
S5	Edge plates: Hinge bolts	2	200 operational hours	SWA 523	Grease
S6	Joint between disc support and frame	4	200 operational hours	SWA 523	Lube nipple
S7	Hydraulic cylinder between disc support and frame	8	200 operational hours	SWA 523 / Oil R68	Lube nipple
S8	Swivel cylinder, joint lugs	2	200 operational hours	SWA 523	Lube nipple
S9	Joint bolts, end runners/joint sleeves	2	200 operational hours	SWA 523	Grease
S10	Flange bearings, trailing rollers	4 (2)	200 operational hours	SWA 523	Lube nipple

Lube regulation for Taurus 4000/3000

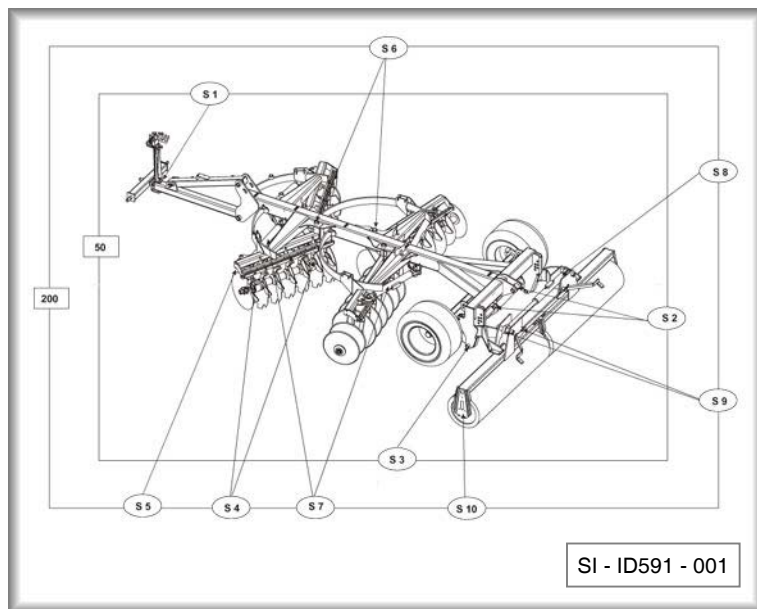

50 - Lube interval in operational hours

S 1 ... - Lube points