



AMAZONE

www.precision-today.de

ZA-V – A world of precision

Mounted spreader | 1,400 l – 4,200 l | 10 m – 36 m

» Profis weighing check

Precise monitoring and control of the application rate via the 200 Hz weighing technology and the tilt sensor.

» Intelligent agitator


The star agitator is positioned over the low-lying outlet opening and provides a continuous fertiliser flow.

» Forward-speed dependent application rate regulation

Highly responsive actuators on the metering slides automatically regulate the application rate.

» Limiter V⁺ electrical border spreading device

The sensitive electrical adjustment of the Limiter V⁺ border spreading device to the respective field boundary enables comfortable switching between field-side, border and water course spreading from the tractor cab during fertiliser application.

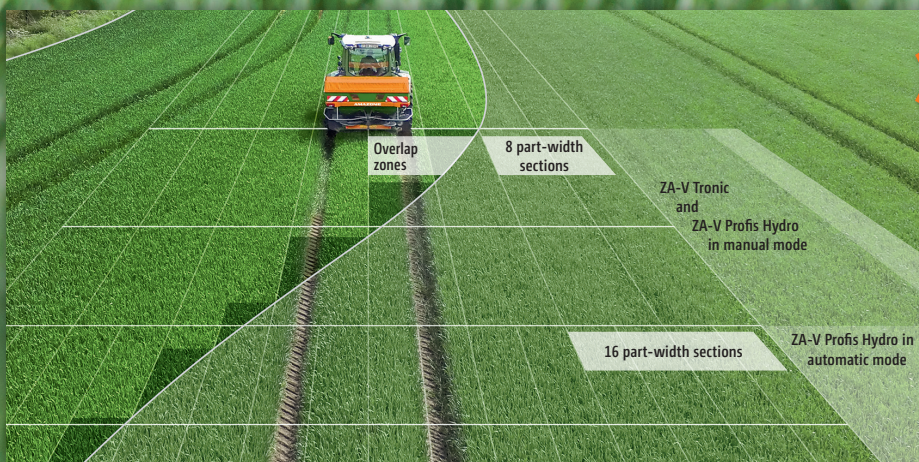

» Automatic GPS-Switch part-area shut-off with Section Control

The 8- or 16-fold part-width section control offered by AMAZONE is a GPS-based, fully automatic part-width section control for the ZA-V Tronic and the hydraulically driven ZA-V Profis Hydro, in which outer part-width sections can be individually controlled.

AmaTron 4
ISOBUS terminal



GO for Innovation | amzone.net



ready for
agrirouter