



Cayros – A world of precision

Mounted reversible plough | 2 to 6 furrows

» Hydraulic front furrow width adjustment

The hydraulic front furrow width adjustment directly changes the working width of the first plough body and adjusts it to the inner track dimension of the tractor. This ensures consistently precise furrow matching especially with varying soils and tractors.

» Precision plough bodies and skimmers

A choice of 8 different plough bodies makes it possible to obtain optimum coverage of all field conditions. The working depth and the tilt can be set via spindles without the need for tools for a perfect work profile.

Skimmers with an adjustable throwing angle provide optimum incorporation and mixture of high organic layers.

» NonStop stone safety devices


Hydraulic NonStop stone safety device with integrated shear bolt. The triggering pressure can be tailored to the location, so that the body maintains the working depth and can avoid obstructions to prevent damage at the same time.

» Disc coulters

The precise cutting action of the disc coulters helps to achieve accurate turning and complete incorporation of crop remains as well as effective furrow clearance.

» Exact depth control

A selection of different support wheels ensures precise depth control and accurate rolling under any conditions.

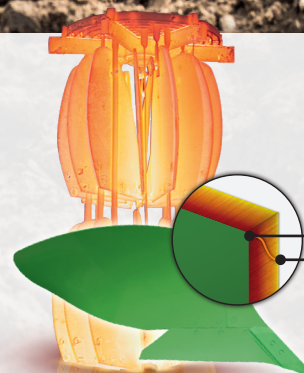

» ©plus hardening process

Precision wearing parts

Unique ©plus advantages for the mouldboard, face of the mouldboard and strips:

- Longer service life
- High impact resistance
- Less pulling power requirement
- Reduced fuel consumption
- Less sticking to the smoother outer surface